



AVK FABRICATED FLANGE ADAPTOR, PN 16

260/30

Non-tensile, dedicated to steel/PVC pipes

100

AVK fabricated flange adaptors is designed to add a flange to plain ended pipes, where a flange is required to connect to other pipeline accessories such as valves and pumps. They can be supplied to any pipeline diameter within their size range and are available for any ferrous and most rigid wall pipelines.

Product Description:

Fabricated flange adaptor for water, wastewater and neutral liquids to max. 70° C


Standards:

- Standard flange drilling to EN1092-2 (ISO 7005-2), PN 16

Features:

- Manufactured from mild steel
- EPDM vulcanized seals
- Can be supplied to any pipeline diameter within the size range
- Suitable for cast iron, ductile iron, steel and PVC pipes
- Can be fitted with flanges of any standard on request
- Sealing range nominal diameter +2 mm to -5 mm
- Epoxy coated according to DIN 30677-2 and AVK guidelines

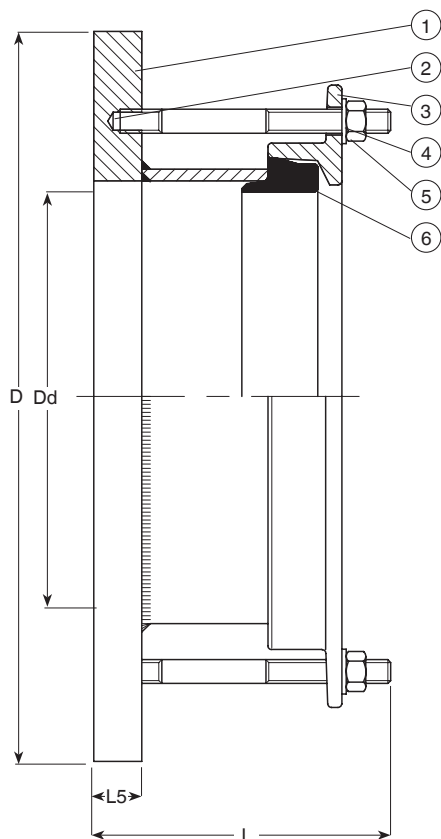


Component List:

1. Body	Mild steel to BS EN 10025 FE430 B	2. Bolt	Steel 8.8, zinc plated and passivated
3. Gland ring	Mild steel to BS EN 10025 FE430 B	4. Washer	Zinc plated and passivated
5. Nut	Steel 8.8, zinc plated and passivated	6. Seal	EPDM rubber to BS EN 2494

Components may be substituted with equivalent or higher class materials without prior notification.

Reference Nos. and Dimensions:

AVK ref. nos	DN mm	D mm	Dd mm	L mm	L5 mm	Bolt no.	Bolt holes	Theoretical weight kg
260-30-0355-10	350	520	356	190	25	8	28	34
260-30-0406-10	400	580	406	190	25	8	31	40
260-30-0457-10	450	640	457	190	25	10	31	46
260-30-0508-10	500	715	508	190	25	10	34	56
260-30-0609-10	600	840	610	190	25	10	37	71
260-30-0711-10	700	910	711	190	25	12	37	72
260-30-0812-10	800	1025	813	190	25	12	40	85
260-30-0914-10	900	1125	914	190	25	14	40	94
260-30-1016-10	1000	1255	1016	210	30	14	43	114
260-30-1220-10	1200	1485	1220	210	30	16	49	145